



NEW DESIGN

MJ-HD1800PRO

With 2-18pcs Ricoh Gen5/Gen6/
Konica 1024i/Konica 1024A

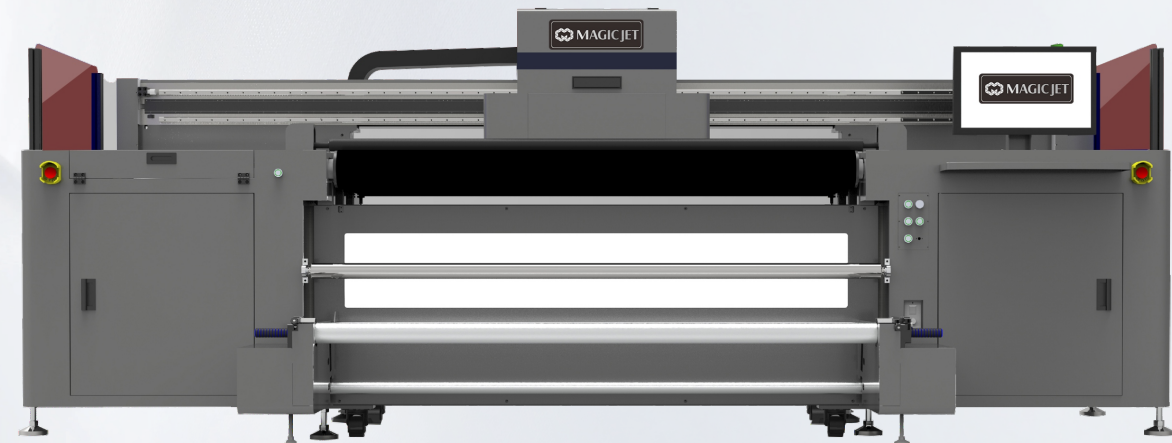

Auto Anti-collision System to avoid damage




Independent constant temperature heating control ink supply system



None after-service negative Ink supply system



Printing material automatic height detection device



Using domestic BYHX in the forefront of inkjet printing control system



Printhead Resolution

Konica1024i



1*CMYK 4 pcs

	Print Speed	DPI
4pass	28m ² /h	1016x720
6pass	25m ² /h	1016x1080



2*CMYK 8 pcs

	Print Speed	DPI
4pass	48m ² /h	1016x720
6pass	35m ² /h	1016x1080



2*CMYK+2W 10 pcs


	Print Speed	DPI
4pass	45m ² /h	1016x720
6pass	36m ² /h	1016x1080



3*CMYK 12 pcs

	Print Speed	DPI
4pass	68m ² /h	1016x720
6pass	53m ² /h	1016x1080


Konica1024i



2*CMYK LC LM W 14 pcs

	Print Speed	DPI
4pass	45m ² /h	1016x720
6pass	36m ² /h	1016x1080

RICOH G5/G6



CMYK W 3 pcs

	Print Speed	DPI
4pass	24m ² /h	720x600
6pass	18m ² /h	720x900



2*CMYK+1W 5 pcs

	Print Speed	DPI
4pass	24m ² /h	720x600
6pass	18m ² /h	720x900



3*CMYK 6 pcs

	Print Speed	DPI
4pass	55m ² /h	720x600
6pass	42m ² /h	720x900

Print Software	Caldera/Photoprint	All-In-One Computer Configurations	8th Generations i7-8750H Processor, 64G/128G, 15.6-inch 1920x1080 Touch Screen
Print Modes	Max 4 rows, match all production need	Print Colors	CMYK LC LM W V
Machine Functions	Movable folder platform, Lack ink alarm, Anti-collision device, Independent Ink heating control, Neagtive inksupply, Print height sensor	Working Environment	3956*1526*1600mm,5000W Electricity Power, 20°C-28°C humidty40%-70%
Printing Heads	2-18pcs Ricoh Gen5/Gen6/Konica 1024i /Konica 1024A	Package Info	4160*1804*1535mm,2000KG
Machine Configurations	THK Guiderail, Leadshine Motor, BYHX Board, Germany imported tank chain, All-In-One Computer(optional)		