MJ-3300F

With 1-28 pcs Ricoh Gen5/Gen6/Konica 1024i/Konica 1024A

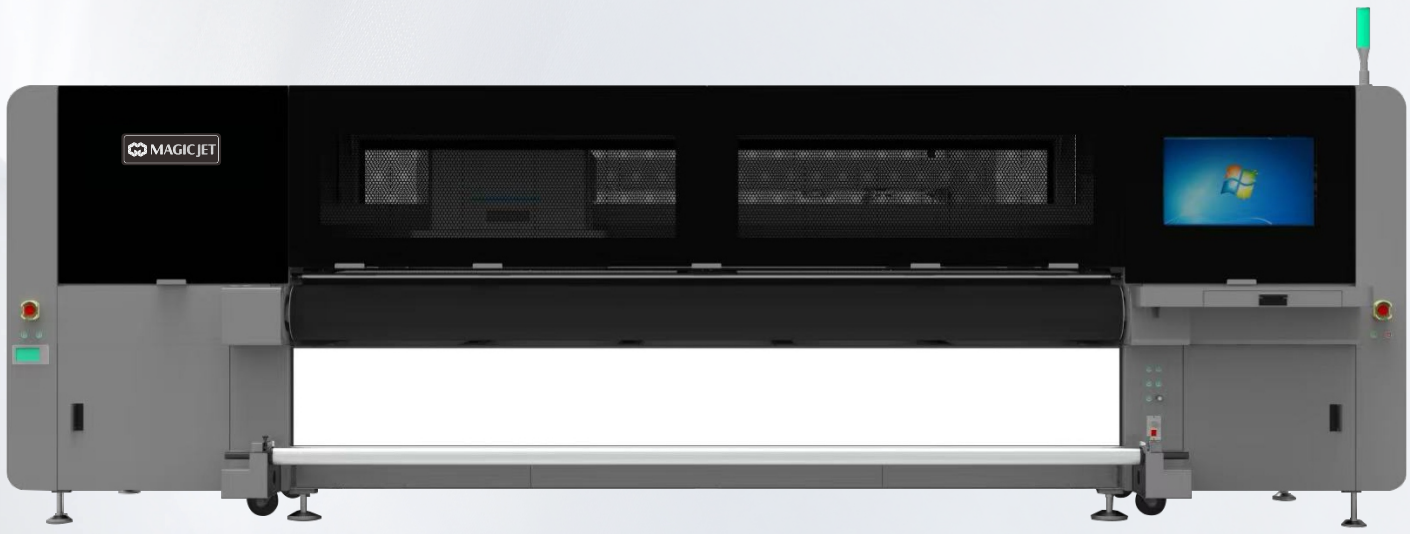



4 serperated suction area to ensure continous printing job



1500W advanced Leadshine stable power servo motor

Advanced magnetic levitation transmission is standard

Intergrated anti-static device to improve machine stability

Special design to prevent material from wrinkling

Printhead Resolution

Konica1024i

1*CMYK W — 5 pcs

	Print Speed	DPI
4pass	33㎡/h	1016x720
6pass	25㎡/h	1016x1080



2*CMYK — 8 pcs

	Print Speed	DPI
4pass	48㎡/h	1016x720
6pass	36㎡/h	1016x1080



2*CMYK+2W — 10 pcs

	Print Speed	DPI
4pass	33㎡/h	1016x720
6pass	25㎡/h	1016x1080



3*CMYK — 12 pcs

	Print Speed	DPI
4pass	68㎡/h	1016x720
6pass	45㎡/h	1016x1080



4*CMYK — 16 pcs

	Print Speed	DPI
4pass	95㎡/h	1016x720
6pass	70㎡/h	1016x1080

RICOH G5/G6

1*CMYK W — 3 pcs

	Print Speed	DPI
4pass	30㎡/h	720x600
6pass	24㎡/h	720x900

1*CMYK W V — 4 pcs

	Print Speed	DPI
4pass	30㎡/h	720x600
6pass	24㎡/h	720x900



2*CMYK+1W — 5 pcs

	Print Speed	DPI
4pass	42㎡/h	720x600
6pass	35㎡/h	720x900



3*CMYK — 6 pcs

	Print Speed	DPI
4pass	58㎡/h	720x600
6pass	46㎡/h	720x900



3*CMYK+2W — 8 pcs

	Print Speed	DPI
4pass	58㎡/h	720x600
6pass	46㎡/h	720x900

Print Software	Caldera/Phototprint	All-In-One Computer Configurations	8th Generations i7-8750H Processor, 64G/128G, 15.6-inch 1920x1080 Touch Screen
Print Modes	Max 4 rows, match all production need		
Machine Functions	Movable folder platform, Lack ink alarm, Anti-collusion device, Independent Ink heating control, Neagtive inksupply, Print height sensor, 4 seperated suction area	Print Colors	CMYK LC LM W V
Printing Heads	1-28pcs Ricoh Gen5/Gen6/Konica 1024i/Konica 1024A	Working Environment	5710*2350*1850mm,6000W Electricity Power, 20℃-28℃ humidty40%-70%
Machine Configurations	THK Guiderail, Leadshine Motor, BYHX Board, Germany imported tank chain, All-In-One Computer(optional)	Package Info	5830*2470*2200mm, 4800KG