






MJ-JV3200&5000&6800Double Side


With 24-36pcs Konica 1024i/1024A

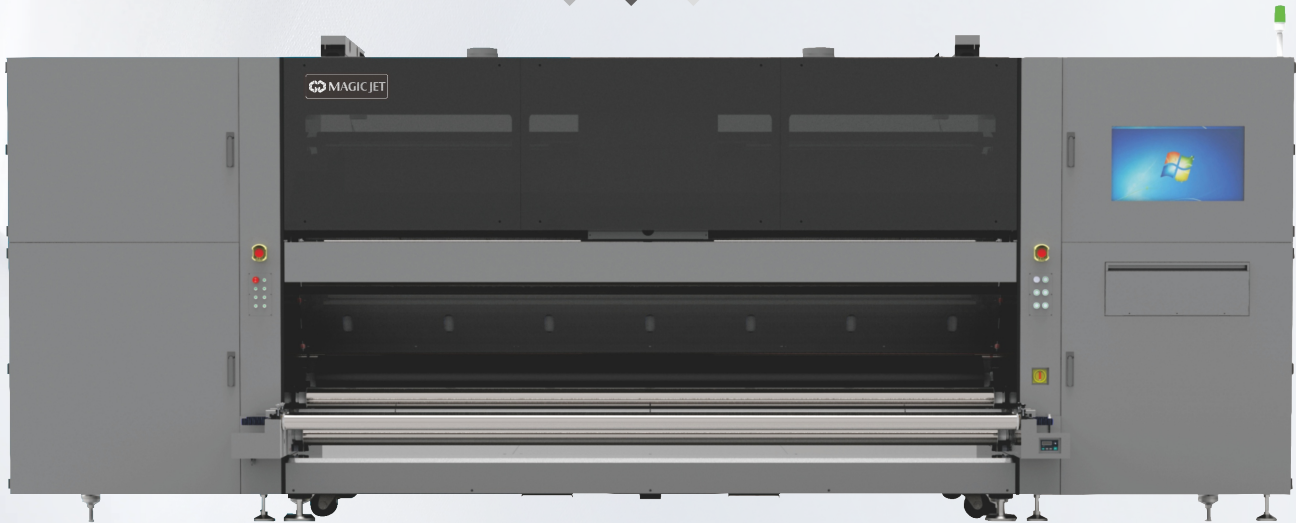

Intelligent constant temperature water cooling variable frequency adsorption platform




Super quiet machine-Imported guiderail with magnetic levitation



Printing color without any deviation also high saturation



All in one computer built-in printer with handle remote control operation



Unlock new profit opportunities with double-sided printing capabilities

Printhead Resolution

Konica1024i



2*CMYK 8 pcs

	Print Speed	DPI
4pass	60m ² /h	1016x720
6pass	45m ² /h	1016x1080



2*CMYK W 10 pcs

	Print Speed	DPI
4pass	60m ² /h	1016x720
6pass	45m ² /h	1016x1080




3*CMYK 12 pcs

	Print Speed	DPI
4pass	80m ² /h	1016x720
6pass	65m ² /h	1016x1080



3*CMYK LC LM 18 pcs

	Print Speed	DPI
4pass	80m ² /h	1016x720
6pass	65m ² /h	1016x1080



4*CMYK LC LM 24 pcs

	Print Speed	DPI
4pass	100m ² /h	1016x720
6pass	85m ² /h	1016x1080



3*CMYK W 15 pcs

	Print Speed	DPI
4pass	80m ² /h	1016x720
6pass	65m ² /h	1016x1080



6*CMYK 24 pcs

	Print Speed	DPI
4pass	180m ² /h	1016x720
6pass	108m ² /h	1016x1080



6*CMYK LC LM 36 pcs

	Print Speed	DPI
4pass	180m ² /h	1016x720
6pass	108m ² /h	1016x1080

Print Software	Caldera/Photoprint	All-In-One Computer Configurations	8th Generations i7-8750H Processor, 64G/128G, 15.6-inch 1920x1080 Touch Screen
Print Modes	Max 3 rows, match all production need		
Machine Functions	UV double side printing, Lack ink alarm, Anti-collision device, Independent Ink heating control, Neagitive ink supply, Print height sensor	Print Colors	CMYK LC LM W V
Printing Heads	24-36pcs Konica 1024i/1024A	Working Environment	6000W Electricity Power, 20°C-28°C humidity 40%-70%
Machine Configurations	THK Guiderail, Leadshine Motor, BYHX Board, Germany imported tank chain, Industrial feeding&take-up system, All-In-One Computer(optional)	Package Info	5950*2670*2350mm, 5000KG